




# PVS-31CL-MOD

Experience the superior situational awareness of the PVS-31CL-MOD, proudly made by GSCI Advanced Photonics.

PVS-31CL-MOD boasts a low-profile design has been perfected with over 30 years of engineering experience and is equipped with the latest technological advancements. It features proprietary GSCI-VIVID high-performance front and rear optics - the lightest optics available on the market today and offers a crystal-clear image. This dual-tube goggle system is one of the lightest you can find!

Other unique operational features, such as instant IR [Morse Code Capability], standard IR [Map Reading / Zero Light Capability], external battery power port, flip-up off, selective channel engagement and stow safety provide remarkable performance and reliability.

With numerous optional accessories such as magnification lenses, head mounting systems, battery packs (including the MVP-240<sup>™</sup>) and recording devices - it can also accept 1xAA or 1xCR123 batteries - you will find this NVG to be the primary choice of multiple users including law enforcement and military agencies worldwide.

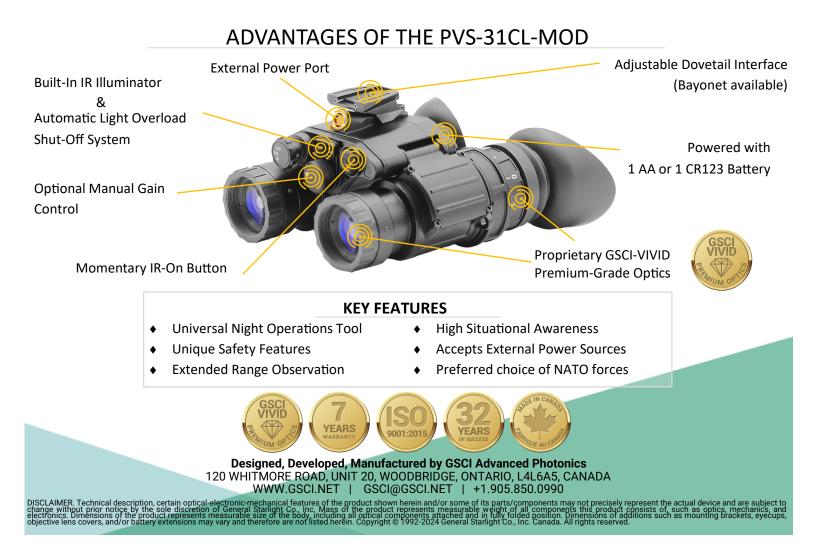






# **PVS-31CL-MOD**

TECHNICAL	
	DATA
Proprietary GSCI-VIVID Premium Optics	Yes
Optical Magnification	1X
Objective Lens Focal Length	27mm
Field Of View <sup>##</sup>	40°
Focusing Range	0.25m Infinity
Diopter Adjustment Range	-6 +2
Interpupillary Adjustment	50mm 90mm
Built-In IR Illuminator	Yes, 950nm
Momentary IR-On Button	Yes
IR-On Indicator	Yes
Manual Gain Control (MGC)	Optional
3-Position Switch	Yes: Off / On / IR
Bright Light Protection	Yes
Bright Light Sensor	Yes
Low Battery Indicator	Yes: concealed into FOV
Stow Safety Feature	Yes
Flip-Up-Off Feature	Yes
Selective Channel Engagement	Yes
Power Source *	1pc AA / 1pc CR123 / MVP-240™
Battery Life on 1x AA / 1x CR123	40 Hours
Battery Life on MVP-240™	240 Hours
External Power Supply	4VDC 15VDC
Environmental Protection	Waterproof
Dimensions	104x105x70mm
Weight **	385 grams
Operating Temperature	-40°C +50°C





\*\*\* ECHO and 4G are the registered trademarks of Photonis Technologies S.A.S.

#### Made In Canada

**ITAR-Free** <sup>‡</sup> Specifications are presented for optical-electronic-mechanic assemblies only and do not include technical characteristics of image intensifier tubes.
<sup>‡</sup> Field Of View (FOV) values are valid if the system is equipped with an 18mm Image Intensifier Tube
\* Batteries not included

\* Weight of the unit excludes an IIT due to its weight variations. Typical weight of an IIT is between 70 and 85 grams as per IIT manufacturers' specifications.



### PVS-31CL-MOD



**Selective Channel Engagement** 

Swiveling a Night Vision Channel Up Disengages It: PVS-31CL-MOD Can Effectively Become Single-Eye Goggle System.



**Extended Range Observation** 


*PVS-31CL-MOD Accepts Afocal Objective Lenses with 3X and 5X Optical Magnification that are Attached to the Existing 1X Lenses.* 





**External Power Port** 

Along with conventional AA and CR123 Batteries PVS-31C-MOD Can be Powered From External Power Sources Such as GSCI MVP-240<sup>™</sup>, USB Power Banks and 12V Car Power Supply.



#### **Stow Safety Feature**

If Activated, The SSF Feature Shuts Off the Unit once it is Stowed and Powers the Unit Back Up when it is Returned Back to the Horizontal Position. SSF is Used to Stay Covert in Night-Time Operations.



### DISTINCTIVE FEATURES (CONTINUED)

Compatibility with Head Gears and Helmet Mounts

*PVS-31CL-MOD is available with Dovetail and Bayonet style mounts.* 



#### **Momentary IR-On Button**

Allows to Instantly Engage IR Illuminator to Quickly Illuminate a Certain Area or Send a Morse-Code Signal to a Team Member.



When Mounted on a Flip-Up Head Gear or a Flip-Up Helmet Mount, PVS-31CL-MOD Turns Off Once in Flip-Up Position.



ISCLAIMER. Technical description, certain optical-electronic-mechnange without prior notice by the sole discretion of General Star ectronics. Dimensions of the product represents measurable size ojective lens covers, and/or battery extensions may vary and theref



nents may not precisely represent the actual device and are subject to proponents this product consists of such as optics, mechanics, and soliton. Dimensions of additions such as mounting brackets, eyecups, anada. All rights reserved.

# PVS-31CL-MOD

### STANDARD EQUIPMENT: WHAT'S IN THE BOX

1	Dual-Tube Night Vision Goggles equipped with GSCI-VIVID Lightweight High-Performance Front and Rear Optics. Bayonet or Dovetail Bracket (Installed on the Device)
2	Rubber Eyecups (2pcs, Installed on the Device)
3	Sacrificial Window (2pcs)
4	Stow Safety Feature (Integrated)
5	AA Battery Extension Adapter (Installed on the Device)
6	Rubber Daytime Filter with Training Hole (Installed on the Device)
7	Adjustment Kit (Allen Key + Mini-Wrench)
8	USB Power Cable
9	Neck Cord
10	Soft Carrying Pouch
11	User Manual
12	Cleaning Kit (3-in-1 Multi-Pen + Cleaning Cloth)

### OPTIONAL EQUIPMENT

А	Advanced Helmet Mount GR8™
В	Advanced Helmet Harness HMH-1 for MICH / ACH Helmets
С	Hard Carrying Case: Waterproof with Foam Insert
D	Universal Multi-Voltage Battery Pack MVP-240™
E	Smartphone Camera Adapter CAS-14
F	3X Magnification Afocal Add-On Objective Lens SL-3: Snap-On or Screw-In
G	5X Magnification Afocal Add-On Objective Lens SL-5: Snap-On or Screw-In
Н	Tactical Infrared Illuminator IR250S. Kit Includes IR250S (850nm), Remote Control, Picatinny Mount
I	Digital HD Recorder with Built-In Display and Video Output NVR-714-D



Designed, Developed, Manufactured by GSCI Advanced Photonics 120 WHITMORE ROAD, UNIT 20, WOODBRIDGE, ONTARIO, L4L6A5, CANADA WWW.GSCI.NET | GSCI@GSCI.NET | +1.905.850.0990

> nechanical features of the product shown herein and/or some of its par Starlight Co., Inc. Mass of the product represents measurable weigh size of the body, including all optical components attached and in fully nerefore are not listed herein. Copyright © 1992-2024 General Starlight (